



Wet-Flash™

Liquid Applied Flashing System

WET-FLASH SP 7700 18 HOUR STUCCO PRIMER

Wet-Flash SP 7700 18 Hour Stucco Primer is a 100% solids, elastomeric coating that can be roll or brush applied to areas where Wet-Flash PM 7000 has been used as a waterproof flashing membrane.

This combination allows a direct-applied stucco system to be installed over a liquid applied flexible flashing membrane.

The Stucco Primer will bond to the PM 7000 surface and Stucco or mortar products will bond to the Stucco Primer.

Proper thickness of SP 7700 18 Hour Stucco Primer is 6-8 mils. This is easily achieved with a ¼" nap roller.

A flexible interface between cementitious substrate and the stucco may reduce inherent cracking telegraphed from the substrate to the stucco at the critical window interface.

Wet-Flash SP 7700 18 Hour Stucco primer is designed to remain uncured until after the stucco has been applied. The Stucco can be applied up to 18 hours after primer coat application.

Application Instructions

Apply with brush or roll onto and 1 inch beyond clean dry PM 7000 substrate to a thickness of 6-8 mils
Do not apply if ambient temperature is <35 or >100 Degrees F.
Apply stucco within 18 hours of primer application.
Clean equipment with mineral spirits before primer has cured.


Physical Properties

Cured Properties

Hardness, Shore A	20-25
Tensile Strength	110 Psi
Elongation at Break	300%
Peel Strength	30 pli
Shrinkage	None
Staining	passes
Corrosive Properties	Non-Corrosive

Uncured properties

Tack Free Time	24 hours
Cure rate	6-8 mils/48 hours
Volatile Organic Content	15 g/Lt .15 lbs/Gal

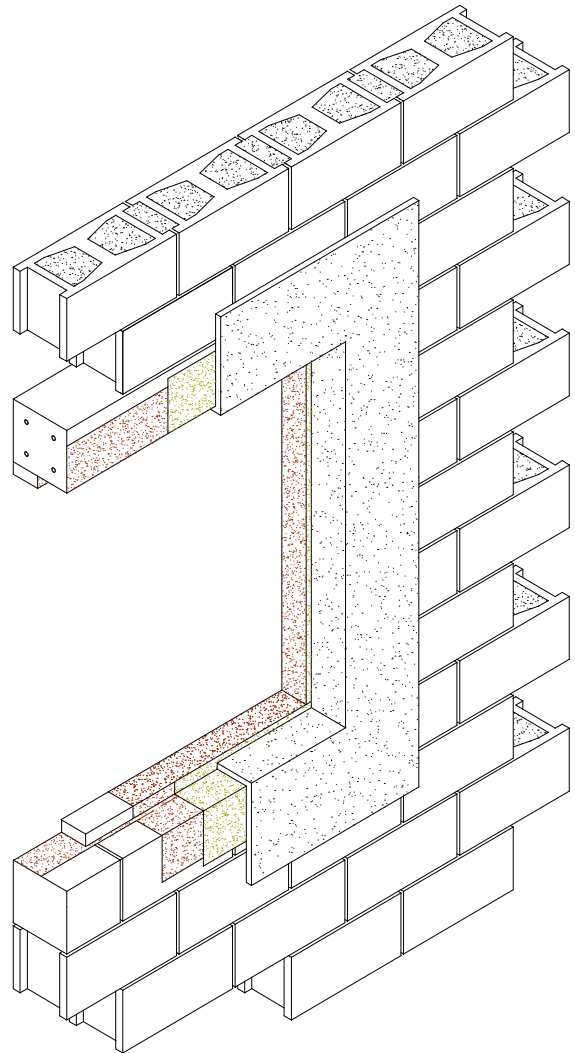

BEI's extensive product testing, even under extreme conditions, has proven Wet-Flash to be durable and flexible with outstanding bond strength. Wet Flash is an air barrier yet vapor permeable and will not contribute to mold or fungus formation.

To see how the Wet-Flash, Liquid Applied Flashing System can save your company and customers building costs and prevent future repair costs contact:

Building Envelope Innovations, LLC
BEI@wet-flash.com

**Building Envelope
Innovations, LLC**

**14755 SE 82nd Drive
Clackamas, OR 97015**

**Phone: 503-972-2305
www.wet-flash.com**